



Kirby Morgan Dive Systems, Inc.®

1430 Jason Way, Santa Maria, California 93455

Phone: 805/928-7772 Fax: 805/928-0342

www.kirbymorgan.com e-mail: info@kirbymorgan.com


Bulletin #1 of 2009. February 27, 2009

Product Bulletin

Communication Module used on Kirby Morgan Helmets & EXO Masks P/N 320-025

The communication mount nut (320-026) should never be tightened using a spanner or other tool. Tightening the mount nut using a tool will add excessive strain to the parts and could cause damage to the module allowing the module to break free, resulting in flooding of the helmet which could cause injury, or drowning.

Products Affected: 305-020, 315-201, 315-206, 315-210, 315-215, 320-023, 320-024, 515-023, 515-024, 520-130, 520-131, 520-132

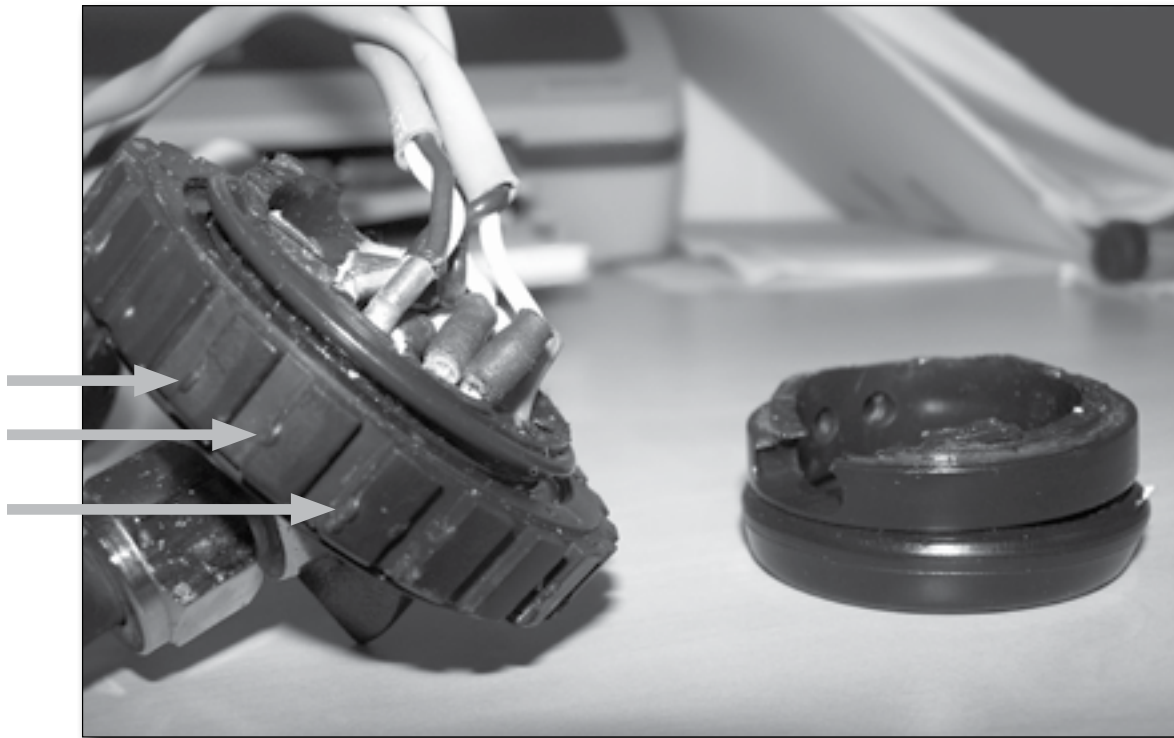

Technicians and users of Kirby Morgan helmets are reminded that the communication mount nut, part number 320-026 used on the Kirby Morgan helmets and EXO full face masks should be tightened by hand only. Wrenches or tools should not be used to tighten the module communication mount nut. The mount nut should be installed and tightened by hand only.

For further information, contact your dealer or sales@kmdsi.com